





You know it when you see it.

It's not just a roof. It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?





SYMPHONY®

- A specially engineered composite shingle that mimics the look and feel of natural slate
- Lighter and more durable than natural slate
- Exceptional UV fade-resistant surface technology for superior color stability
- 50-year limited, transferable warranty*
- 7-year SureStart[™] protection
- 5-year 90 mph wind-resistance warranty
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:


• UL Class A (with approved underlayment)

Wind Resistance:

 Passed ASTM D3161 wind resistance at 110 mph


Impact Resistance:

• UL2218 Class 4












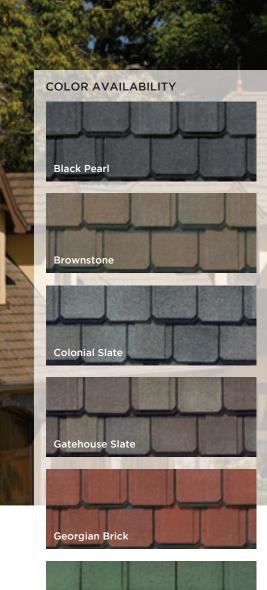













GRAND MANOR®

- Two full-size, fiber glass base shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



BELMONT™

- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (Select colors**)



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

• UL certified to meet ASTM D3462

Impact Resistance:


 Belmont IR is UL2218, Class 4 (Select colors only)
























CARRIAGE HOUSE®

- Two full-size, fiber glass base shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- ullet UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:


 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

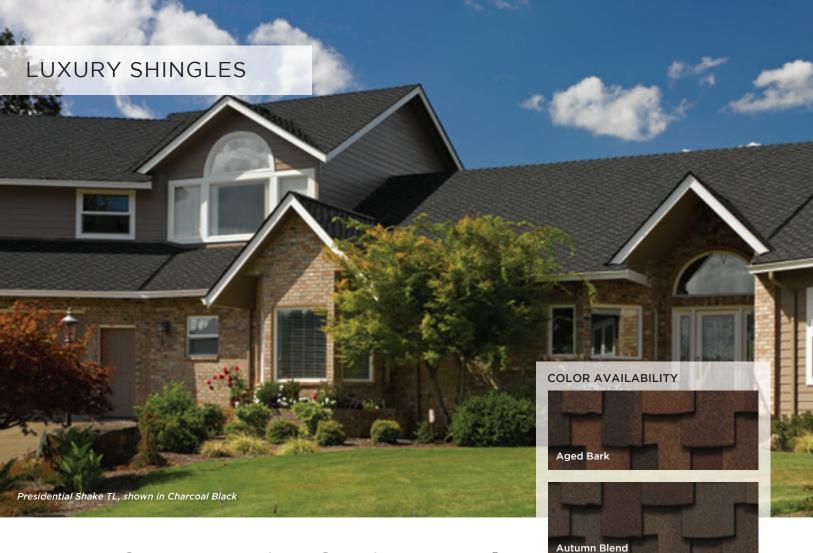

PRESIDENTIAL SHAKE TL®

- Three-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:












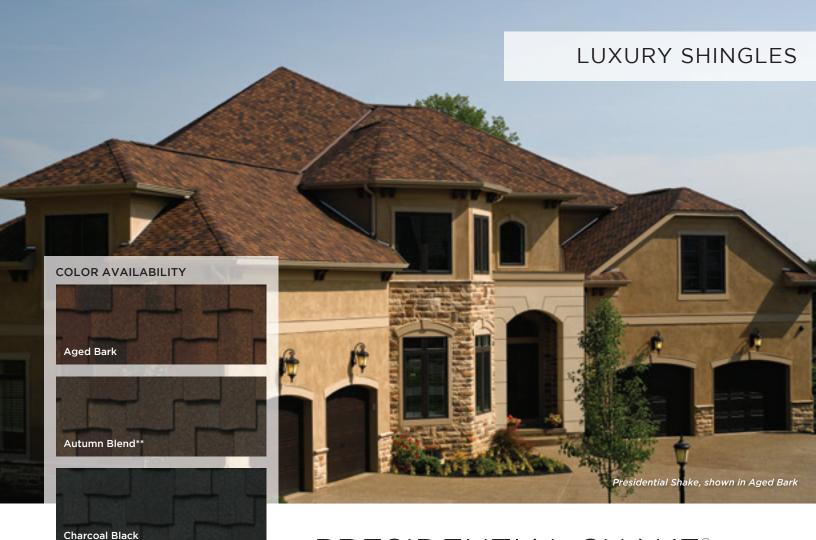












PRESIDENTIAL SHAKE®

- Two-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (Select colors**)
- ENERGY STAR qualified version available: Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements. (Select color***)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



LANDMARK® PREMIUM

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 300 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:


















Max Def Prairie Wood




Max Def Colonial Slate











LANDMARK® PRO

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:



LANDMARK®

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 240 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance:Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:


























COLOR AVAILABILITY

LANDMARK SOLARIS GOLD





LANDMARK SOLARIS PLATINUM







LANDMARK SOLARIS®


Solar Reflective Shingles

- Two-piece laminated fiber glass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select color**)
- * See warranty for specific details and limitations.

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

	Color	CRRC Rated Product Directory							
Product		Solar Reflectance		Thermal Emittance		Solar Reflective Index		ets Iifornia Ie 24?*	ergy ır rtified?
		Initial	Aged	Initial	Aged	Initial	Aged	₹g≓	E SS S
Landmark Solaris" Gold	Max Def Resawn Shake	0.26	0.25	0.88	0.90	26	25	YES	YES
Landmark Solaris" Gold	Max Def Weathered Wood	0.25	0.24	0.90	0.89	25	24	YES	YES
Landmark Solaris" Platinum	Coastal Tan	0.40	0.36	0.91	0.90	45	40	YES	YES
Landmark Solaris [®] Platinum	Santa Fe	0.40	0.35	0.90	0.91	45	39	YES	YES
Landmark Solaris" Platinum	Sierra Buff	0.41	0.37	0.92	0.90	47	41	YES	YES

^{*} New products without aged solar reflectance values comply using the equation provided in Section 110.8.i.2 of California Title 24, Part 6

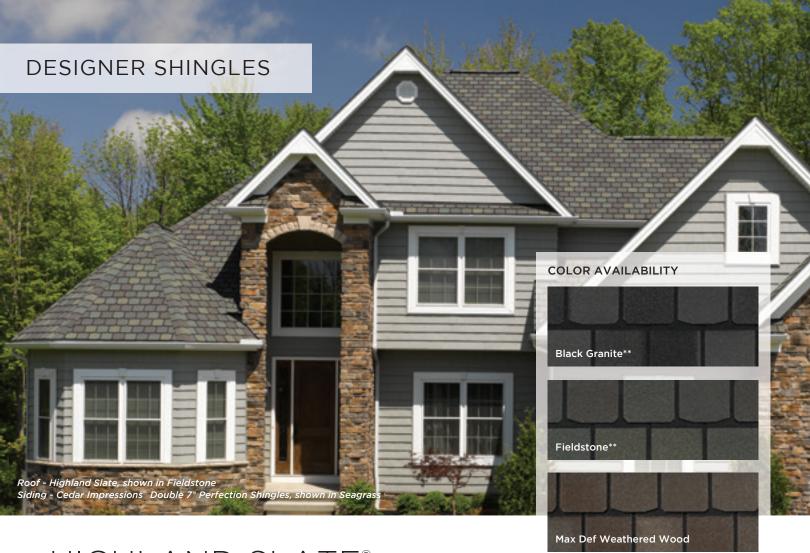

HIGHLAND SLATE®

- · Single layer fiber glass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select colors**)



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Impact Resistance:

• Highland Slate IR is UL2218, Class 4 (Select colors only)


Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:













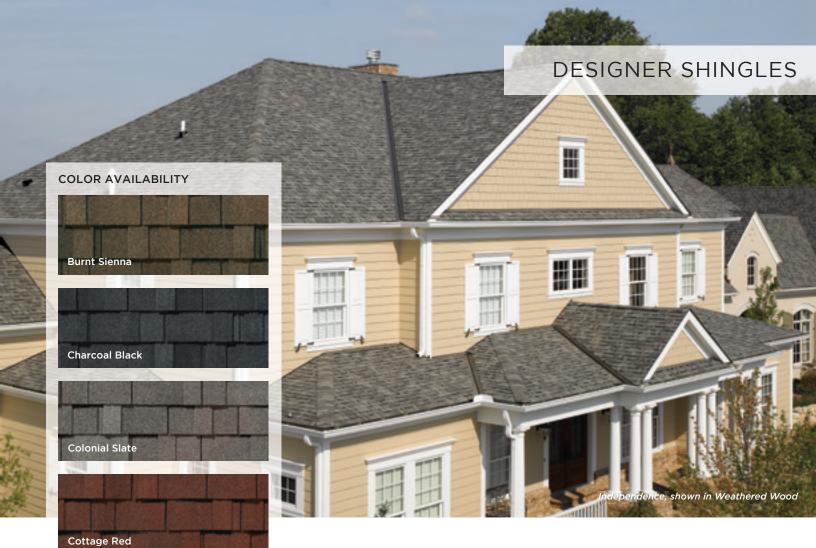












INDEPENDENCE®

- One full-size, fiber glass base shingle with randomly applied tabs
- Deep shadow lines and random tabs create a distinct dimensional look
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:



PATRIOT

- Architectural style shingles
- Single layer fiber glass-based construction
- Intricate color blend drops combined with intermittent shadow lines
- 215 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 8-year SureStart[™] protection
- 10-year 110 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3161 Class F
- UL certified to meet ASTM D7158 Class H

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:











TRADITIONAL SHINGLES





In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CERTAINTEED XT™25

- Fiber glass composition
- Designed for long-lasting performance and durability
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

• UL certified to meet ASTM D3018 Type 1

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Autumn Brown
Black
Coral Frost
Gray Frost
Moire Black
Nickel Gray
Oakwood
Maple Red Blend
Slate Gray

Star White Timber Blend Weathered Wood

HIP AND RIDGE ACCESSORIES




Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- · Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- · Algae resistant



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- · Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (--see individual Roofing Plant Catalogs for color availability)



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



Symphony®

- Used for hip and ridge capping
- Matches Symphony colors



Integrity Roof System™

Integrity is built from the bottom up. Layer-on-layer, only CertainTeed provides the peace of mind that comes with the best components performing together for peak efficiency.



- Waterproof Underlayment
 Waterproofing shingle underlayment prevents
- 2. Water-resistant Underlayment
 High-performance underlayment provides a
 water-resistant layer over the roof deck and a
 secondary barrier against leaks

leaks from wind-driven rain and ice dams

3. Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

- 4. Roof Shingles
 Choose the best, covered by the strongest warranty in the business
- 5. Hip & Ridge Caps

 Perfect finish for hip and ridge lines, complementing all CertainTeed shingles
- Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents

SELECTION GUIDE

LUXURY SHIN	NGLES	Shingle Construction and Description	Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance	
Grand Manor		Two full-size, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	~	~	V		Class F, 110 mph	
Belmont Impact Resistant Version Available (Select colors)	Suf-	Single layer, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate	275	~	~	V	Class 4	Class F, 110 mph	
Carriage House	un	Two full-size, fiber glass base shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied	350	~	~	V		Class F, 110 mph	
Presidential Shake TL	mund	Three-piece laminated fiber glass construction; Distinctive sculpted, rustic look		~	~	~		Class F, 110 mph	
Presidential Shake Impact Resistant Version Available	mund	Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look	355	~	~	V	Class 4	Class F, 110 mph	
Presidential Solaris	hour	Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look	355	~	~	>		Class F, 110 mph	
COMPOSITE	SLATE								
Symphony	V. A.	A specially engineered composite roofing shingle that mimics the look and feel of natural slate; Lighter and more durable than natural slate; exceptional UV fade-resistant surface technology	varies	/ ***			Class 4	Passed at 110 mph	
DESIGNER SH	IINGLES								
Landmark Premium		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	300	~	~	~		Class F, 110 mph	
Landmark Pro	TOTAL	Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	250	~	~	V		Class F, 110 mph	
Landmark	THE REAL PROPERTY.	Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	240	~	~	V		Class F, 110 mph	
Landmark Solaris Impact Resistant Version Available		Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	250	~	~	V	Class 4	Class F, 110 mph	
Highland Slate Impact Resistant Version Available (Select colors)		Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate	240	~	~	>	Class 4	Class F, 110 mph	
Independence		One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look	250	~	~	V		V	
Patriot	AGE AND	Architectural style shingle; Single layer fiber glass base construction; Intricate color blend drops combined with intermittent shadow lines	215	~	~	V		Class F, 110 mph	
TRADITIONAL SHINGLES									
XT 25		Fiber glass composition; Designed for long-lasting performance and durability	205	~	~	V		V	

^{**} Wind warranty upgrade to 130 mph available.

Miami-Dade Product Control Acceptance	Conforms To CSA Standard A123.5	Limited Transferable Warranty Against Manufacturing Defects On Residential Applications '50-Year on Group-owned or Commercial Applications	StreakFighter algae-resistance Warranty (where available)	SureStart Protection	Wind-Resistance Warranty Ugarded wind warranty available. See warranty for details and limitations	Shingle Size	Bundles Per Square
>	V	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
٧		Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	4
٧	>	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
~	>	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
>	~	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
>	>	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
			1				
		50-year		7-year	5-year 90 mph	18" x 6", 9" & 12"	varies
>	>	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
>	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
>	~	Lifetime	10-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
>	~	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
~	>	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
	V	Lifetime*	15-year	10-year	15-year 110 mph **	12" x 36" 5" Exposure	4
~	~	30-year	10-year	8-year	10-year 110 mph	13 1/4" x 39 3/8" 5 5/8" Exposure	3
/	~	25-year	10-year	5-year	5-year 60 mph	12" x 36" 5" Exposure	3

^{***} With approved underlayment

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Belmont and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- · Assures Class A fire rating
- · Saves significant installation time

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Shangle® Ridge Accessory

- Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle Shadow Ridge®
- Hip and ridge for Landmark Series and Independence; 30 lineal ft. per bundle; 24 shingles per bundle

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle;
 24 shingles per bundle

Cedar Crest®

Hip and ridge for Landmark Series,
 Presdential Shake, Presidential Shake TL,
 Highland Slate and Belmont; 20 lineal ft.
 per bundle

Symphony® Hip and Ridge

 Full line of hip and ridge accessories to complement and enhance the slate-inspired look of Symphony.

Ventilation

- CertainTeed Ridge Vent 12" filtered
- CertainTeed Rolled Ridge Vent filtered
- · CertainTeed Intake Vent filtered
- CertainTeed Static Vent

StreakFighter® algae-resistance protection

StreakFighter is a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. It helps safeguard a roof's beauty, especially in humid areas.

SureStart™ protection


Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period,
CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

Roofers' Select®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- · Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind



DiamondDeck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.



WinterGuard®





When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.


For specific details and limitations, refer to the actual product warranties.

MetaLayment® Self-Adhering Metal Underlayment

MetaLayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.



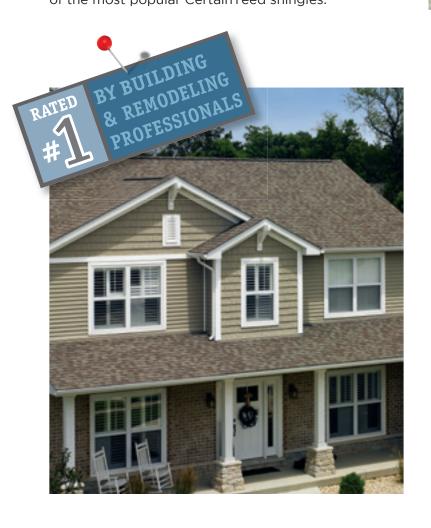

What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

RESIDENTIAL ROOFING





CertainTeed Corporation

20 Moores Road Malvern, PA 19355 www.certainteed.com Products available in areas shown



ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE GYPSUM • CEILINGS • INSULATION

Professional: 800-233-8990 Consumer: 800-782-8777